



PARTIAL TOP VIEW

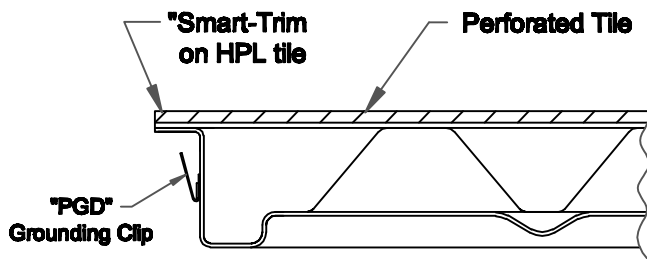

PARTIAL SIDE VIEW

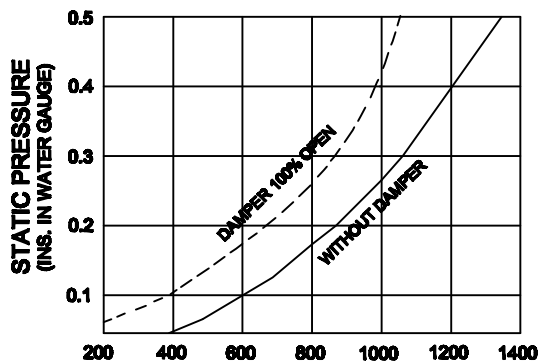

VOLUME OF AIR FLOW (C.F.M.)

PHYSICAL DATA

- Weight of Bare panel - 17 lb.
- 25% open area
- Fire rating of bare panel:
Class A Flame Spread
Non-Combustible Materials

PERFORMANCE DATA

- Concentrated Load rating - 1,000 lbf (4448 N)
- Uniform Load rating - 400 psf (1779 kg/M²)
- Ultimate Load rating - 3,200 lbf (14,233 N)
Safety Factor - 3-to-1 Min.
- Impact Load rating - 175 lb. (79 Kg)
- Rolling Load Rating:
CISCA Wheel A (10 Pass) - 400 lbf (1779 N)
CISCA Wheel B (10K Pass) - 400 lbf (1779 N)

FINISH OPTIONS

- HPL tile (1/8" or 1/8")
ASM "Smart-Trim", "Dura-Trim" or "Mono"
- Vinyl tile:
VPT "Con-Tile" (static conductive)
VPT "Stat-Tile" (static dissipative)
- Bare surface

UNDERSTRUCTURE OPTIONS

- Free standing - stringerless
- Rigid Grid bolted stringers:
2' x 2' system
2' x 4' system
4' x 4' Basketweave system

FEATURES

- 25% open area for air flow
- Available in 24" or 600mm size
- Available with top-adjusting side dampers
- Completely interchangeable with FS series and S-series panel systems
- Powder coat epoxy paint finish
- Full-hard top sheet
- Full-strength, deep drawn corners
- Recycled material content of system = 42.3%

NOTE: Data sheet drawing and information are subject to change without prior notice.

June 2011