



BARE CORNER-LOCK PANEL

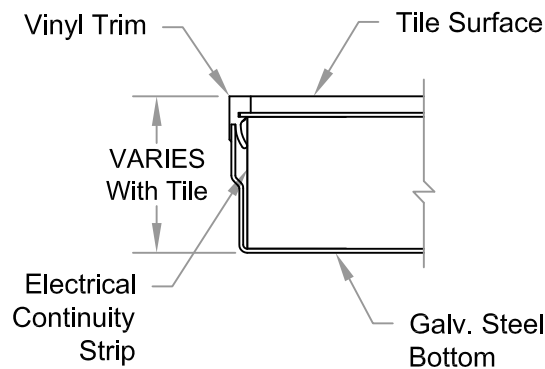

TILE COVERED PANEL

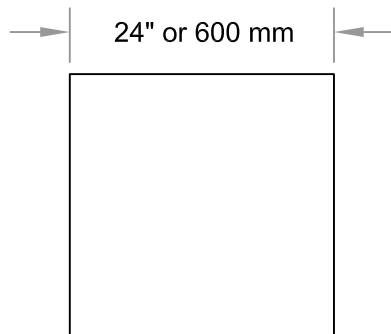

TOP VIEW

PHYSICAL DATA

- Weight of bare panel - 28 lb.
- Height of bare panel - 1.06"
- Fire rating of bare panel:
Class A Flame Spread

PERFORMANCE DATA

- Concentrated Load rating - 1,250 lbf
- Uniform Load rating - 300 psf
- Ultimate Load rating - 3,000 lbf
- Safety Factor - 2-to-1 Min.
- Rolling Load Rating:
 - CISCA Wheel A (10 Pass) - 1,000 lbf
 - CISCA Wheel B (10K Pass) - 800 lbf

FINISH OPTIONS

- HPL tile ($\frac{1}{16}$ " or $\frac{1}{8}$ ")
 - Vinyl tile:
 - Rubber tile:
 - Bare surface
 - Bare corner-lock
- Contact ASM for other tile options, such as bamboo, cork, ceramic, wood, stone, etc.

UNDERSTRUCTURE OPTIONS

- Free standing - stringerless
- Corner-Lock
- "Bolt-Tite" bolted stringers
- "Snap-Tite" snap-on stringers

FEATURES

- Available in 24" or 600mm size
Also available in 400mm x 600mm